



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b>  <b>H04L 12/64</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/25487</b>  <b>(43) International Publication Date:</b> 4 May 2000 (04.05.00)
<b>(21) International Application Number:</b> PCT/EP99/08067  <b>(22) International Filing Date:</b> 26 October 1999 (26.10.99)  <b>(30) Priority Data:</b> 982335 27 October 1998 (27.10.98) FI  <b>(71) Applicant (for all designated States except US):</b> TELEFON-AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> GRAF, Leslie [AU/AU]; 3 Hender Court, Balwyn, VIC 3103 (AU). GROVES, Christian [AU/AU]; 21 Garden Avenue, Keilor, VIC 3036 (AU). RYTINA, Ian [AU/AU]; 28/25 Barkly Street, Carlton, VIC 3053 (AU).  <b>(74) Agent:</b> BORENIUS & CO OY AB; Kansakoulukuja 3, FIN-00100 Helsinki (FI).		<b>(81) Designated States:</b> AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> DETERMINATION OF THE PROPAGATION DELAY IN A PACKET SWITCHED NETWORK.  <div data-bbox="331 1148 1235 1377" data-label="Diagram"> </div> <b>(57) Abstract</b>  <p>A method of determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit. In response to a request for a telephone circuit between two subscribers, a packet containing an echo request message is transmitted over the packet switched network from a first network node to a second network node. The second network node reacts to receipt of the echo request message by transmitting a packet containing an echo reply message to the first network node. The first network node then determines the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo request message from the first node and receiving the echo reply message also at the first node.</p>		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DETERMINATION OF THE PROPAGATION DELAY IN A PACKET SWITCHED NETWORK

Field of the Invention

5 The present invention relates to packet switched networks and more particularly to the transmission of real time voice and data information over a packet switched network.

10 Background to the Invention

Conventional telecommunications networks for conveying voice and other user information have in general relied upon dedicated telecommunications network infrastructure  
15 and transmission protocols. However, with the recent explosive growth in digital data transmission, driven in particular by the use of intranets and the Internet, there has been a move towards the use of more generic infrastructure and transmission protocols in the  
20 telecommunications industry. This move is driven primarily by the desire for interoperability between telecommunications networks and other data networks, and secondarily by the cost and performance advantages which general data network systems offer over conventional  
25 telecommunications systems.

There exist proposals for the replacement of certain parts of telecommunications networks with packet switched networks and in particular with Internet  
30 Protocol (IP) networks. For example, telephone exchanges may be interconnected via IP networks for the purpose of carrying both signalling and user voice and data information.

35 Subscriber telephone terminals in a Public Switched Telephone Network (PSTN) are generally connected to

respective local exchanges via two-wire connections which provide for duplex (i.e. bidirectional) communication. A so-called "hybrid" located at the local exchange converts the bidirectional voice signals from the two-wire lines into unidirectional signals for transmission over four-wire lines used in the inter-exchange trunk connections. Imperfections in the hybrids may allow leakage of signals back to a speaker's telephone from where the signals originated, giving rise to the perception of an echo.

In conventional networks, the problem of echo is reduced by including an echo cancellation device in a telephone circuit if the propagation delay over the circuit exceeds some predefined period (e.g. 15msec). As the route taken by a telephone circuit is not always predefined, the first exchange in the circuit identifies the "statically" defined delay for next leg and forwards this to the exchange at the end of that leg. The receiving exchange then appends the delay for the next leg to the already accumulated delay and forwards this to the next exchange and so on. When the accumulated delay exceeds the predefined period, a backward message is sent to the originating exchange asking for an incoming or outgoing echo cancellation device to be included in the circuit.

The above process works because in conventional telephone circuits, which use circuit switched traffic channels, the propagation delay over a circuit leg can be predicted with great accuracy. The proposal to transmit telephone voice data between exchanges using a packet switched network upsets this situation as by its very nature packet switched circuits are unpredictable. Unpredictability arises both because a packet may be transmitted between two end points by one of several

different routes and because the network uses only a "best effort" to transmit a packet, i.e. if the network is busy a packet may have to wait or may indeed be lost. The propagation delay over a circuit link provided by a packet switched network cannot therefore be statically defined.

#### Summary of the Present Invention

10 It is an object of the present invention to overcome or at least mitigate the above noted disadvantages of using packet switched networks in telecommunication networks. It is a further object of the present invention to provide a telecommunication network in which the  
15 propagation delay for voice data sent over a packet switched network can be dynamically determined for the purposes of echo cancellation.

According to a first aspect of the present invention  
20 there is provided a method of determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the method comprising:

- 25 reacting to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message over the packet switched network from a first network node to a second network node;
- 30 reacting to receipt of the echo request message at the second network node by transmitting a packet containing an echo reply message over the packet switched network from the second network node to the first network node; and
- 35 and determining the round trip propagation delay for the packet switched network segment on the basis of

the time which elapses between sending the echo request message from the first node and receiving the echo reply message also at the first node.

- 5 Preferably, the propagation delay for the packet switched network segment is determined prior to the sending of an Initial Address Message (IAM) over the packet switched network segment. More preferably, the determined round trip delay is appended or added to  
10 delays determined for preceding circuit segments defined in the IAM, for transmission over the packet switched network.

- Preferably, the method described above is employed with  
15 an IP network.

- According to a second aspect of the present invention there is provided apparatus for determining the propagation delay over a packet switched network  
20 intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the apparatus comprising:

- a first packet switched network node coupled between a first subscriber and the packet switched  
25 network and arranged to react to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message over the packet switched network to a second packet switched network node;

- 30 the second node being arranged to react to receipt of the echo request message by transmitting a packet containing an echo reply message over the packet switched network to the first network node; and

- processing means associated with the first network  
35 node arranged to determine the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo

request message from the first node and receiving the echo reply message also at the first node.

#### 5 Brief Description of the Drawings

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the  
10 accompanying drawings, in which:

Figure 1 shows schematically a telecommunications system incorporating an IP network; and

Figure 2 is a flow diagram showing a part of a call set-up phase in the system of Figure 1.

15

#### Detailed Description of Certain Embodiments

There is illustrated in Figure 1 a telephone system in which a pair of subscriber telephone terminals 1,2 are  
20 connected to respective local access exchanges 3,4 via PSTN access networks. The access exchanges 3,4 are in turn connected to respective IP gateway nodes 5,6 via an ISUP (ISDN User Part) interface. Interconnection between the gateway nodes 5,6 is provided via an IP  
25 network 7 which may be the Internet or, as is more likely, a closed network employing the TCP/IP protocol.

It will be appreciated that the example shown in Figure 1 is greatly simplified and the system may include one  
30 or more transit exchanges connecting the local access exchanges 3,4 to the IP gateway nodes 5,6. Moreover, the connection between the subscriber terminals 1,2 and the access exchanges 3,4 may be made via one or more intermediate "routers". It will also be appreciated  
35 that the IP network 7 comprises a number of interconnected routers such that the path taken by a

packet between the two gateway nodes 5,6 may vary under different circumstances.

Full details of a typical call set-up procedure in a PSTN will not be given here. Rather, the reader is referred to for example to "Understanding Telecommunications", Studentlitteratur, Sweden (ISBN 91-44-00214-9). For the purpose of the present discussion it is sufficient to note that after an access exchange 3 receives a B-number dialled by a subscriber telephone 1, interexchange signalling takes place over the ISUP interface to establish a telephone circuit for the requested call.

In the example of Figure 1, an Initial Address Message (IAM) requesting allocation and reservation of a circuit is passed from the access exchange 3 to the gateway node 5. This IAM identifies the destination exchange 4, from which the gateway node 5 determines that the next leg of the circuit extends over the IP network 7 to the second gateway node 6. The originating side gateway node 5 formulates an Echo Request message and transmits this over the IP network 7 to the terminating side gateway node 6, which responds by returning an Echo Reply message. On the basis of the time elapsed between transmitting the Echo Request message and receiving the Echo Reply message the originating side gateway node 5 is able to determine the round trip propagation delay for a data packet under the current IP network conditions.

The determined propagation delay is then appended to any accumulated delays already included in the IAM received by the originating side gateway 5 from the access exchange 3 (e.g. the round trip propagation delay between the access exchange 3 and the gateway node 5).

The modified IAM is then sent over the IP network 7 to the terminating side gateway node 6 where the (static) round trip propagation delay for the link between that gateway node 6 and the terminating side exchange 4 is further appended to the IAM contained delay. The IAM can then be passed to the terminating exchange 4. Following the establishment of the complete telephone circuit, an Address Complete Message (ACM) is returned from the terminating exchange 4 to the originating exchange 3, the message containing the total accumulated propagation delay.

A decision on whether to introduce an incoming or outgoing echo cancellation device into the telephone circuit may be made at the originating exchange 3 on the basis of accumulated propagation delay returned in the ACM. Alternatively, an echo cancellation device may be introduced at the terminating side access exchange 4.

Figure 2 illustrates further the steps involved in calculating the round trip propagation delay at the originating side gateway node 5.

It will be appreciated by the person of skill in the art that modifications may be made to the above described embodiment without departing from the scope of the present invention. For example, whilst the above description has been concerned with the use of an IP network, the invention is applicable to any suitable packet switched network.

Claims

1. A method of determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the method comprising:
  - reacting to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message over the packet switched network from a first network node to a second network node;
  - reacting to receipt of the echo request message at the second network node by transmitting a packet containing an echo reply message over the packet switched network from the second network node to the first network node; and
  - and determining the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo request message from the first node and receiving the echo reply message also at the first node.
2. A method according to claim 1 and comprising determining the propagation delay for the packet switched network segment prior to the sending of an Initial Address Message (IAM) over the packet switched network segment.
3. A method according to claim 2 and comprising appending or adding the determined round trip delay to delays determined for preceding circuit segments and defined in the IAM, for transmission over the packet switched network.

4. A method according to any one of the preceding claims wherein the packet switched network is an IP network.

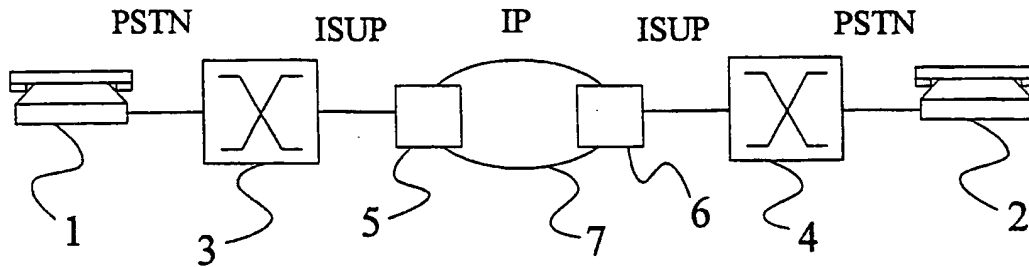
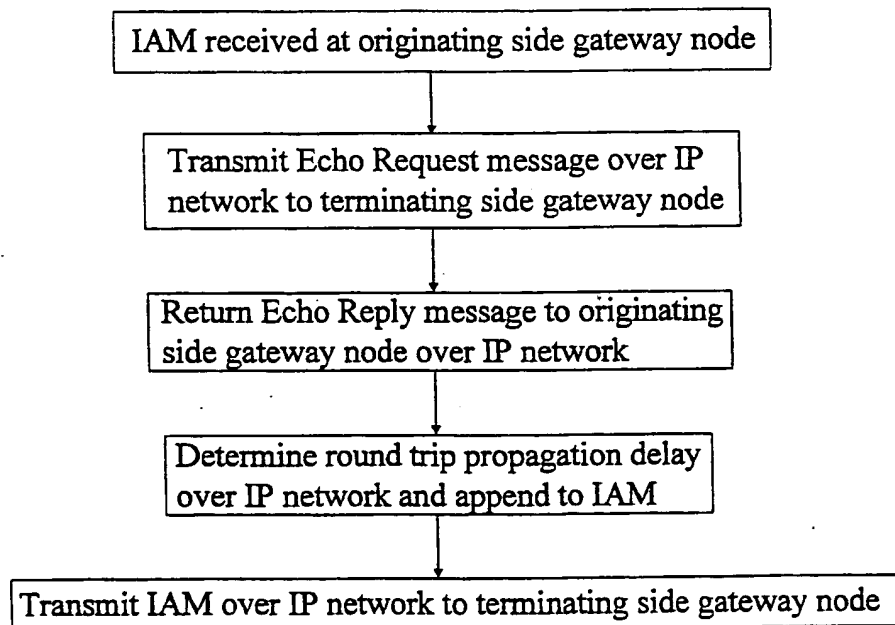
5 5. Apparatus for determining the propagation delay over a packet switched network intended to provide a segment of a telephone circuit for carrying information between at least two subscriber terminals, the apparatus comprising:

10 a first packet switched network node coupled between a first subscriber and the packet switched network and arranged to react to a request for a telephone circuit between said two subscribers by transmitting a packet containing an echo request message  
15 over the packet switched network to a second packet switched network node;

the second node being arranged to react to receipt of the echo request message by transmitting a packet containing an echo reply message over the packet  
20 switched network to the first network node; and

processing means associated with the first network node arranged to determine the round trip propagation delay for the packet switched network segment on the basis of the time which elapses between sending the echo  
25 request message from the first node and receiving the echo reply message also at the first node.

1/1

Figure 1Figure 2

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 99/08067

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 781 554 A (ORGAN RUPERT J) 14 July 1998 (1998-07-14) column 1, line 24 - line 46	1,5
Y	page EP090595, column 3, line 57 -column 4, line 12	2-4
Y	WO 97 26763 A (ERICSSON TELEFON AB L M) 24 July 1997 (1997-07-24) page 15, line 3 -page 16, line 17	2,3
Y	US 5 477 531 A (PHAAL PETER ET AL) 19 December 1995 (1995-12-19) column 4, line 3 - line 23	4
P,X	EP 0 905 959 A (CONVERSE NETWORK SYST INC) 31 March 1999 (1999-03-31) column 5, line 5 - line 19 column 13, line 42 - line 55	1,4,5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "A" document member of the same patent family

Date of the actual completion of the international search

7 February 2000

Date of mailing of the international search report

18/02/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3018

Authorized officer

Gregori, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/08067

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5781554 A	14-07-1998	AU 703430 B	25-03-1999
		AU 1459495 A	21-08-1995
		CA 2181049 A	10-08-1995
		CN 1140518 A	15-01-1997
		DE 69509499 D	10-06-1999
		DE 69509499 T	18-11-1999
		EP 0742978 A	20-11-1996
		WO 9521497 A	10-08-1995
		JP 9508511 T	26-08-1997
		NZ 278624 A	29-01-1997
		SG 47978 A	17-04-1998
WO 9726763 A	24-07-1997	US 5857009 A	05-01-1999
		AU 1460097 A	11-08-1997
		BR 9707035 A	20-07-1999
		CA 2242369 A	24-07-1997
		CN 1214175 A	14-04-1999
		EP 0878100 A	18-11-1998
US 5477531 A	19-12-1995	BR 9207130 A	12-12-1995
		CA 2117999 A	28-10-1993
		CN 1096164 A, B	14-12-1994
		CZ 9402544 A	16-08-1995
		EP 0522211 A	13-01-1993
		HU 69973 A	28-09-1995
		AT 170045 T	15-09-1998
		AU 676134 B	06-03-1997
		AU 1547092 A	18-11-1995
		EP 0636001 A	01-02-1995
		ES 2122993 T	01-01-1999
		WO 9320705 A	28-10-1995
		JP 6508008 T	08-09-1994
		US 5391387 A	21-02-1995
		DE 69116685 D	07-03-1996
		DE 69116685 T	30-05-1996
		WO 9222967 A	23-12-1992
EP 0905959 A	31-03-1999	AU 7860498 A	11-02-1999
		JP 11191791 A	13-07-1999